



WWW.KETROWA.IR




درباره کتروا

تأمین مصالح و تجهیزات پروژه‌های ساختمانی همواره یکی از مهم‌ترین دغدغه‌های سازندگان و مدیران پروژه‌هاست. اهمیت این مسئله نشأت گرفته از تأثیر مستقیم آن بر زمان بندی پروژه، هزینه تمام شده ساخت و ارزش ساختمان نهایی است.

تیم کتروا با هدف تسهیل فرایند تأمین کالاهای ساختمانی و با در نظر گرفتن مسئولیت اجتماعی خود، سامانه‌ای جامع و برخط را ایجاد نموده است. در این سامانه، سازندگان قادر خواهند بود برای پروژه‌های ساختمانی خود، زمان بندی تأمین مصالح و تجهیزات را آماده نمایند و براساس این برنامه، سفارش تأمین کالا داشته باشند. این سفارش‌ها با مقایسه کالاهای متنوع موجود در سامانه انجام می‌گیرد.

انبوه سازان، مهمترین مشتریان هدف کتروا هستند و کتروا تلاش می‌کند با برنامه ریزی منطقی برای سازندگان و با ارائه مدل خرید نقدی و اعتباری، تأمین و تحویل به موقع کالا را به مصرف کننده ارائه نماید.

تأمین کالاهای ساختمانی برای بازارهای صادراتی، یکی دیگر از اهداف اصلی کتروا است. کتروا قصد دارد بازار سنتی و غیرشفاف را به بازاری مدرن، پرسرعت و دقیق تبدیل نماید که در آن خریداران با مناسب ترین قیمت به کالاهای با کیفیت مدنظر خود دست یابند.

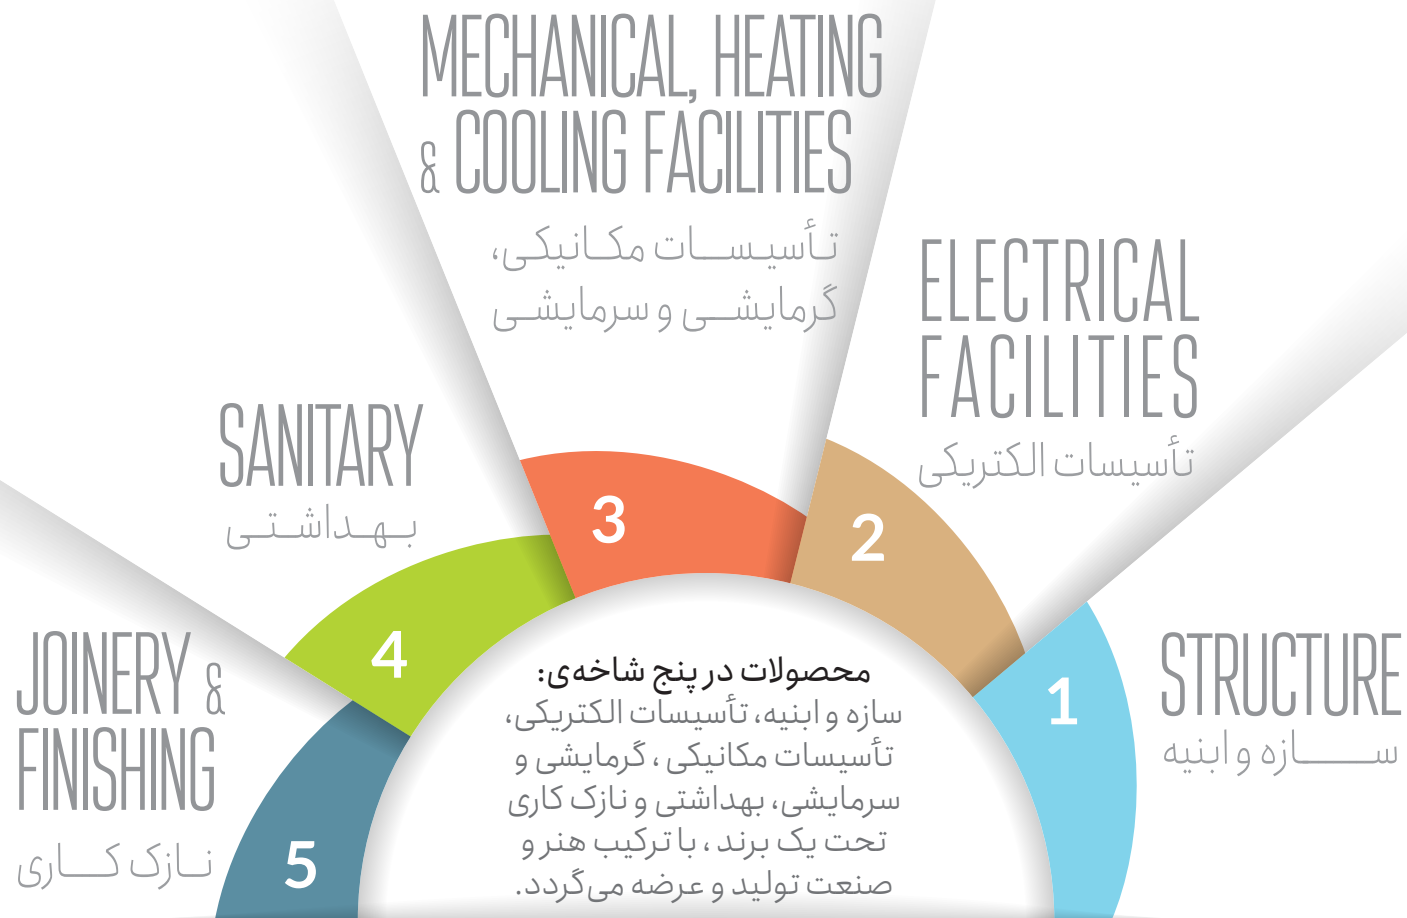

Products are produced and supplied in five branches:
Structure, Electrical Facilities, Mechanical, Heating & Cooling Facilities,
Sanitary, Joinery & Finishing., combining art and industry.

Package & Cast Iron Boiler

پکیج و دیگ چدنی







Cast Iron Package for Dual-Burner Ground Heating (Diesel-Gas) Class G

- Heat capacity 38000 to 110000 kcal/h
- Equipped with a 60 litre capacity spa reserve
- Ability to work with two types of gas and diesel burners
- Suitable for use in summer and mountain areas without natural gas fuel
- Ability to work at low water pressures
- Simultaneous use of domestic hot water and air conditioning
- The most suitable package for use in blower heating systems (air conditioner, fan coil, split duct, etc.)
- Complete combustion of fuel and minimal pollution in the environment
- High thermal efficiency, low fuel consumption, beautiful and durable
- Ability to install floor heating circuit
- The most suitable package for working with heavy and chalky water
- Quick and easy installation
- No formation of an electric pile between the package cast iron pot and the aluminum or steel radiator in order to avoid severe corrosion damage
- Ability to connect to hot water return
- Equipped with pump anti-seize system, water anti-freeze and electronic fault finder
- Ability to connect to building management system (BMS) and network
- Equipped with advanced intelligent control system

Dimensions of the Installation Site

اندازه های محل نصب

Model	Dimensions (mm)	A	B	C	D	E	F	G	H
G		125	690	695	830	1040	60	190	330
Model	/	Unit	G380	G500	G620	G750	G750	G1100	
Nominal heat capacity (Urban Gas)	Kcal/hr		38000	50000	62000	75000	88000	110000	
	Kw		44	58	72	87	102	128	
	Btu/hr		152000	200000	248000	300000	352000	440000	
Diesel consumption	Kg/hr		3.5	4.6	5.8	6.9	8.2	10.2	
Maximum circulating water pressure	bar					3			
Urban gas pressure (G20)	mmH2O					180-200			
Natural gas consumption (urban)	m3/hr		4.4	6.8	7.3	8.8	10	13	
Number of boiler blades	blades		4	5	6	7	8	10	
Maximum burner flame length	mm		350	425	500	575	650	725	
Volume of hot water source	Litre					60			
Chimney diameter	mm					φ180			
Frequency/Voltage	V(AC)Hz					220/50			
Power consumption	W		36-70		37-78		180-195		
Ingress protection class	IP					54			
Height	mm					1100			
Width	mm					400			
Depth	mm		700		800	900	1000	1200	
Weight	Kg		205	240	275	310	345	430	



Cast Iron Package for Dual-Burner Ground Heating (Diesel-Gas) Class GL

- Equipped with pump anti-seize system, water anti-freeze and electronic fault finder.
- Equipped with advanced intelligent control system.
- Ability to work with two types of gas and diesel burners.
- Suitable for use in summer and mountain areas without natural gas fuel.
- Ability to work at low water pressures.
- Simultaneous use of domestic hot water and air conditioning.
- The most suitable package for use in blower heating systems (air conditioner, fan coil, split duct, etc.)
- Complete combustion of fuel and minimal pollution in the environment.
- Ability to install floor heating circuit.
- The most suitable package for working with heavy and chalky water.
- No formation of an electric pile between the package cast iron pot and the aluminum or steel radiator in order to avoid severe corrosion damage.
- Quick and easy installation.
- Ability to connect to building management system (BMS) and network.
- Heat capacity 88000 to 550000 kcal/h.
- Equipped with advanced intelligent control system.
- Maximum input power without burner.
- Suitable for residential units with a large area (villas, penthouses, etc.) or public environments with a large area (banks, schools, hospitals, swimming pools, etc.)

Dimensions of the Installation Site

اندازه های محل نصب

Model	Dimensions (mm)	A	B	C	D	E	F	G	H	I	J	K	L
GLC		140	300	690	695	120	150	220	335	1,1/4"	φ180	400	740
GLE		150	505	765	850	140	130	220	410	2"	φ250	500	950
GLS		150	670	990	1020	120	115	250	510	3"	230x330	600	1140

Model /	Unit	GLC880	GLC1100	GLE1400	GLE1800	GLE2200	GLE2600	GLS3000	GLS3800	GLS4600	GLS5500	
Nominal heat capacity (Urban Gas)	Kcal/hr	88000	110000	140000	180000	220000	260000	300000	380000	460000	550000	
	Kw	102	128	164	211	257.5	304.5	344	442.5	541	639	
	Btu/hr	352000	440000	560000	720000	880000	1040000	1176000	1512000	1848000	2184000	
Diesel consumption	Kg/hr	8	10	13	17	20.5	24	28	35.5	43	51	
Urban gas pressure (G20)	mmH2O	180-200										
Natural gas consumption (urban)	m3/hr	10	13	16.5	21	26	30.5	35	42	54	65	
Maximum circulating water pressure	bar	3		5				6				
Frequency/Voltage	V(AC)/Hz	220/50								3x380/50		
Power consumption	W	180-195		506-595				564-735		465-763		
Ingress protection class	IP	54										
Number of boiler blades	blades	8	10	8	10	12	14	8	10	12	14	
Chimney diameter	mm	φ180		φ250				230x330				
Height	mm	750		950				1140				
Width	mm	400		500				600				
Depth	mm	1000	1200	1330	1550	1770	1990	1500	1740	1980	2220	
Weight	Kg	285	355	535	660	785	910	810	985	1160	1340	

Cast Iron Package for Gas-Burning Floor Heating (Atmospheric) Class E

- Equipped with pump anti-seize system, water anti-freeze and electronic fault finder
- Ability to connect to building management system (BMS) and network.
- Equipped with advanced intelligent control system.
- Ability to work at low water pressures.
- Simultaneous use of domestic hot water and air conditioning.
- The most suitable package for use in blower heating systems (air conditioner, fan coil, split duct, etc.)
- Complete combustion of fuel and minimal pollution in the environment.
- The most suitable package for working with heavy and chalky water.
- No formation of an electric pile between the package cast iron pot and the aluminum or steel radiator in order to avoid severe corrosion damage.
- Equipped with a 60 litre capacity spa reserve.
- Heat capacity 18000 to 54000 kcal/h
- The ability to install a gas stove in order to use the kitchen space optimally
- Can be installed in 0.3 square metres of kitchen
- No sound (atmospheric)
- Ability to work with one cubic metre of natural gas per hour
- Ability to install gas exhaust fan and floor heating circuit
- Complete combustion of fuel and minimal pollution in the environment
- The ability to separately adjust the water temperature of the package intelligently based on the outside temperature
- It has a quick heating system for sanitary hot water
- PLUS
 - A) Stronger customized pump for systems with more path loss such as split duct, fan coil, air washer, underfloor heating, etc.
 - B) module or automatic flame adjustment
 - C) Filling valve or electric boiler water supply
- SMART
 - A) Inverter pump that automatically changes pump speed according to needs.
 - B) module or automatic flame adjustment
 - B) Filling valve or electric boiler water supply

Dimensions of the Installation Site

اندازه های محل نصب

Model	Dimensions (mm)	A	B	C	D	E	F
E240		660	180	500	240	150	3.4
E480		820	260	660	240	150	3.4
E600		910	310	750	175	180	1
E720		990	350	830	175	180	1



Cast Iron Package for Gas-Burning Floor Heating (Atmospheric) Class E

پکیج چدنی شوفاژ زمینی گازسوز (اتمسفریک) کلاس E

Model /	Unit	E240	E360	E480	E600	E720
Nominal heat capacity (Urban Gas)	Kcal/hr	18000	27000	36000	45000	54000
	Kw	21	31	42	53	63
	Btu/hr	72000	108000	1440000	180000	216000
Urban gas pressure (G20)	mmH2O	180-200				
Natural gas consumption (urban)	m3/hr	2.1	3.2	4.2	5.3	6.4
Maximum circulating water pressure	bar	3				
Number of boiler blades	blades	3	4	5	6	7
Volume of hot water source	litre	60				
Frequency/Voltage	V(AC)/Hz	220/50				
Power consumption	W	36-70			37-87	
Ingress protection class	IP	54				
Chimney diameter	mm	φ150				φ180
Height	mm	730	1365	730		
Width	mm	660	400	820	910	990
Depth	mm	550				
Weight	Kg	110	135	145	165	185



Cast Iron Package for Gas-Burning Floor Heating (Atmospheric) Class S

- Equipped with pump anti-seize system, water anti-freeze and electronic fault finder.
- Ability to connect to building management system (BMS) and network
- Equipped with advanced intelligent control system
- Ability to work at low water pressures
- Simultaneous use of domestic hot water and air conditioning
- The most suitable package for use in blower heating systems (air conditioner, fan coil, split duct, etc.)
- Complete combustion of fuel and minimal pollution in the environment
- High thermal efficiency, low fuel consumption, beautiful and durable
- The most suitable package for working with heavy and chalky water
- No formation of an electric pile between the package cast iron pot and the aluminum or steel radiator in order to avoid severe corrosion damage
- Ability to connect to hot water return
- Can be installed in 0.3 square metres of kitchen
- Ability to install gas exhaust fan and floor heating circuit
- Quick and easy installation
- Heat capacity 18000 to 54000 kcal/h
- Equipped with a 120 litre capacity spa reserve
- Stainless steel

Dimensions of the Installation Site

اندازه های محل نصب

Model	Dimensions (mm)	A	B	C	D	E	F
S360		310	3"/4	615	φ150	480	240
S480		270	3"/4	615	φ150	480	240
S600		910	1"	620	φ150	570	175
S720		990	1"	620	φ180	650	175

Cast Iron Package for Gas-Burning Floor Heating (Atmospheric) Class E

پکیج چدنی شوفاژ زمینی گازسوز (اتمسفریک) کلاس E

Model /	Unit	S360	S480	S600	S720
Nominal heat capacity (Urban Gas)	Kcal/hr	27000	36000	45000	54000
	Kw	31	41	53	63
	Btu/hr	108000	144000	180000	216000
Urban gas pressure (G20)	mmH2O	180-200			
Natural gas consumption (urban)	m3/hr	3.2	4.2	5.3	6.4
Maximum circulating water pressure	bar	3			
Number of boiler blades	blades	4	5	6	7
Volume of hot water source	litre	120			
Frequency/Voltage	V(AC)/Hz	220/50			
Power consumption	W	36-70		37-78	
Ingress protection class	IP	54			
Chimney diameter	mm	φ150			φ180
Height	mm	1445			
Width	mm	480	480	570	650
Depth	mm	550			
Weight	Kg	149	167	185	210

Cast Iron Package for Gas-Burning Floor Heating (At-mospheric) Class SL

- Heat capacity 72000 to 171000 kcal/h
 - Cascading installation capability
 - Gas pipe size
 - Equipped with a 60 litre capacity spa reserve 1,252 / 5,000
- It is suitable for heating and supplying hot water to apartments and residential buildings with a capacity of 27,000 to 54,000 kilocalories per hour. It can be easily installed in the kitchen and its dimensions are designed in such a way that it is compatible with the standard of kitchen cabinets. It has low gas consumption, is completely silent, and due to the use of a cast iron pot with an excellent thermal surface, it has high thermal efficiency and is resistant to corrosion. Hot water is provided by a 120 litre coiled source, this source is galvanized and therefore hot water is completely hygienic. The cast iron package is equipped with safety valves for the heating water system as well as the hot water source. The temperature setting is done by the control system, which can be adjusted between 30 and 90 degrees Celsius. Water circulation in the system is done by the pump and has three states: low, medium and high. The water pressure of the system is adjusted by the water valve entering the device, and the working pressure is between 0.5 and 3 bar. The use of a cast iron pot and hot water storage source with a high cross section in the heating and hot water circuit and insensitivity to high hardness water have distinguished these packages from similar samples. The package is equipped with a smoke sensor and automatically turns off the device if the smoke outlet is blocked. It is possible to install a gas exhaust fan and produce a package suitable for the underfloor heating system.
- Equipped with pump anti-seize system, water anti-freeze and electronic fault finder.
 - Ability to connect to building management system (BMS) and network
 - Equipped with advanced intelligent control system
 - Ability to work at low water pressures
 - Simultaneous use of domestic hot water and air conditioning
 - The most suitable package for use in blower heating systems (air conditioner, fan coil, split duct, etc.)
 - Complete combustion of fuel and minimal pollution in the environment
 - High thermal efficiency, low fuel consumption, beautiful and durable
 - The most suitable package for working with heavy and chalky water
 - No formation of an electric pile between the package cast iron pot and the aluminum or steel radiator in order to avoid severe corrosion damage
 - Ability to connect to hot water return
 - Can be installed in 0.3 square metres of kitchen
 - Ability to install gas exhaust fan and floor heating circuit
 - Quick and easy installation

Dimensions of the Installation Site

اندازه های محل نصب

Model	Dimensions (mm)	A	B	C	Gas pipe size
SL960		960	830	490	1/2"
SL1200		1120	990	600	1/2"
SL1600		1340	1210	700	1"
SL2020		1590	1460	825	1"
SL2300		1850	1720	925	1"

Cast Iron Package for Gas-Burning Floor Heating (At-Mospheric) Class SL

پکیج چدنی شوفاژ زمینی گازسوز (اتمسفریک) کلاس SL

Model /	Unit	SL960	SL1200	SL1600	SL2020	SL2300
Nominal heat capacity (Urban Gas)	Kcal/hr	27000	90000	117000	144000	171000
	Kw	84	105	136	167	200
	Btu/hr	288000	360000	468000	576000	648000
Urban gas pressure (G20)	mmH2O	180-200				
Natural gas consumption (urban)	m3/hr	8.5	11	14	17	20
Maximum circulating water pressure	bar	3				
Number of boiler blades	blades	9	11	14	17	20
Volume of hot water source	litre	120				
Frequency/Voltage	V(AC)/Hz	220/50				
Power consumption	W	180-195		224-294		
Ingress protection class	IP	54				
Chimney diameter	mm	φ220				
Height	mm	765				
Width	mm	960	1120	1340	1950	1850
Depth	mm	580				
Weight	Kg	211	248	302	360	430





info@ketrowa.com
www.ketrowa.ir