

WWW.KETROWA.IR

درباره کتروا

تأمین مصالح و تجهیزات پروژه‌های ساختمانی همواره یکی از مهم‌ترین دغدغه‌های سازندگان و مدیران پروژه‌هاست. اهمیت این مسئله نشأت گرفته از تأثیر مستقیم آن بر زمان بندی پروژه، هزینه تمام شده ساخت و ارزش ساختمان نهایی است.

تیم کتروا با هدف تسهیل فرایند تأمین کالاهای ساختمانی و با در نظر گرفتن مسئولیت اجتماعی خود، سامانه‌ای جامع و برخط را ایجاد نموده است. در این سامانه، سازندگان قادر خواهند بود برای پروژه‌های ساختمانی خود، زمان بندی تأمین مصالح و تجهیزات را آماده نمایند و براساس این برنامه، سفارش تأمین کالا داشته باشند. این سفارش‌ها با مقایسه کالاهای متنوع موجود در سامانه انجام می‌گیرد.

انبوه سازان، مهمترین مشتریان هدف کتروا هستند و کتروا تلاش می‌کند با برنامه ریزی منطقی برای سازندگان و با ارائه مدل خرید نقدی و اعتباری، تأمین و تحویل به موقع کالا را به مصرف کننده ارائه نماید.

تأمین کالاهای ساختمانی برای بازارهای صادراتی، یکی دیگر از اهداف اصلی کتروا است. کتروا قصد دارد بازار سنتی و غیرشفاف را به بازاری مدرن، پرسرعت و دقیق تبدیل نماید که در آن خریداران با مناسب ترین قیمت به کالاهای با کیفیت مدنظر خود دست یابند.






:Products are produced and supplied in five branches
 Structure, Electrical Facilities, Mechanical, Heating & Cooling Facilities,
 Sanitary, Joinery & Finishing., combining art and industry



Fiber Optic Network Equipment

تجهيزات شبکه فیبر نوری



Unitube Fibre Optic Cables

■ Compact Universal cables used for direct burial:

- Accurate fibre excess length
- Specially designed compact structure and PE sheath
- Crush resistant and flexible
- PSP enhances the cable's crush-resistance, impact-resistance and moisture proofing
- Two parallel steel wires ensure tensile strength
- Small diameter, lightweight and hassle-free installation
- Long delivery length

■ OM2 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.1 and ISO/IEC 11801:2002 Amd.2 OM2

■ OS1 9/125 compliant with ITU G.652.D, IEC 60793-2-50 Type B1.3, ISO/IEC 11801:2011 Ed2.2



■ Cable mechanical characteristics tested according to IEC 60794-1

OS1 9/125

Length	Type
2000m	4 fibre, OS1 9/125, Unitube Light Armoured
2000m	6 fibre, OS1 9/125, Unitube Light Armoured
2000m	8 fibre, OS1 9/125, Unitube Light Armoured
2000m	12 fibre, OS1 9/125, Unitube Light Armoured
2000m	24 fibre, OS1 9/125, Unitube Light Armoured


OM2 50/125

Length	Type
2000m	4 fibre, OM2 50/125, Stranded Loose Tube Armoured
2000m	6 fibre, OM2 50/125, Stranded Loose Tube Armoured
2000m	12 fibre, OM2 50/125, Stranded Loose Tube Armoured
2000m	24 fibre, OM2 50/125, Stranded Loose Tube Armoured



FL-C Loose Tube Fibre Optic Cables

- **Compact and universal cables suitable for indoor and specific outdoor installations:**
 - Low Smoke Zero Halogen (LSZH) green coloured external sheath
 - UV resistant
 - dielectric
 - high tensile strength
 - rodent retardant
 - longitudinally watertight
- **Maximum pulling force: 1500 Newton (1800 Newton for 24FO)**
- **Rodent protection:**
- **Minimum bending radius: OD x 10 (ex: 51mm for 5,1mm OD)**
- **Ambiant air temperature (minimum & maximum):**
 - for installation: -5° ... +50°C
 - for operation: -20°... +70°
 - for storage: -40° ... +70°
- **Tight buffered gel-free cable construction with 900 µm coating.**
- **Flame retardant according to IEC 60 332-1, EN 50 265 2.1, NFC 32 070 2.1 (Category C2). Fire retardant according to IEC 60 332-3 C, EN 50 266, NFC 32 070 2.2 (Category C1) Performances**
- **OM2 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.1 and ISO/IEC 11801:2011 Ed2.2 OM2.**
- **OM3 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.2 and ISO/IEC 11801:2011 Ed2.2 OM3.**
- **OM4 50/125 compliant with IEC 60793-2-10 Type A1a.3, ISO/IEC 11801:2011 Ed2.2 OM4.**
- **OS1/OS2 9/125 compliant with ITU G.652.D, IEC 60793-2-50 Type B1.3, ISO/IEC 11801:2011 Ed2.2 OS2.**
- **Cable mechanical characteristics tested according to IEC 60794-1 Use**
- **High data rate fibre optic backbones for building and campus**
- **Horizontal cable (FTTD Fibre to the desk) with the 2 fibres**
- **Suitable for direct termination: installation with connectors (prefbred, cold-cured and/or heat-cured types).**

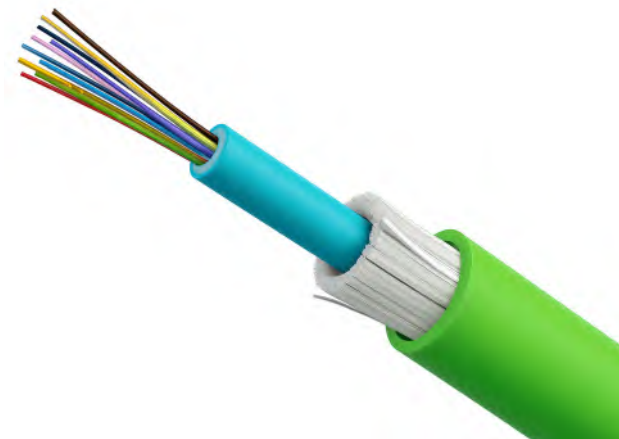

OM2 50/125 µm

Diameter	Length	Type
6.2mm	2100m	8 fibres, OM2 50/125, Loose tube, Up to 10Gbps ethernet supported

OS1/OS2 9/125 µm

Diameter	Length	Type
6.2mm	525m	12 fibres, OS1/OS2 9/125, Loose tube, Up to 100Gbps ethernet supported
6.2mm	2100m	


OM3 50/125 µm

Diameter	Length	Type
6.2mm	525m	OM3 50/125, Loose tube, 12 fibres Up to 40Gbps ethernet supported
6.2mm	2100m	



FL-C Tight Buffered Fibre Optic Cables

- **Compact and universal cables suitable for indoor and specific outdoor installations:**
 - Low Smoke Zero Halogen (LSZH) green coloured external sheath
 - UV resistant
 - dielectric
 - high tensile strength
 - rodent retardant
 - longitudinally watertight
- **Maximum pulling force: 1500 Newton (1800 Newton for 24FO)**
- **Rodent protection:**
- **Minimum bending radius: OD x 10 (ex: 51mm for 5,1mm OD)**
- **Ambiant air temperature (minimum & maximum):**
 - for installation: -5° ... +50°C
 - for operation: -20°... +70°
 - for storage: -40° ... +70°
- **Tight buffered gel-free cable construction with 900 µm coating.**
- **Flame retardant according to IEC 60 332-1, EN 50 265 2.1, NFC 32 070 2.1 (Category C2). Fire retardant according to IEC 60 332-3 C, EN 50 266, NFC 32 070 2.2 (Category C1)**

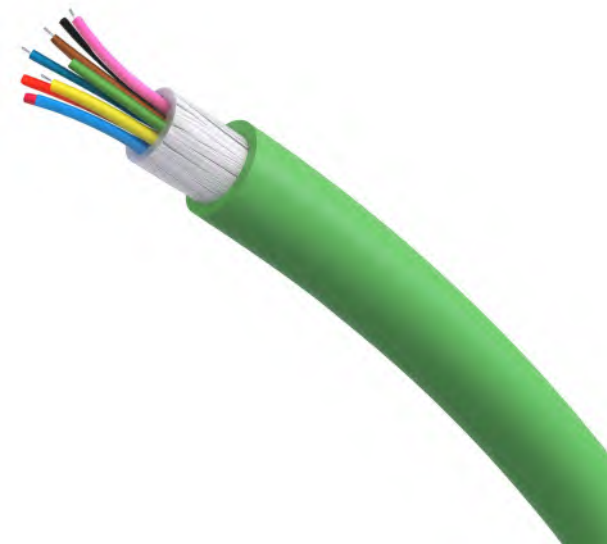

Performances


- **OM2 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.1 and ISO/IEC 11801:2011 Ed2.2 OM2.**
- **OM3 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.2 and ISO/IEC 11801:2011 Ed2.2 OM3.**
- **OM4 50/125 compliant with IEC 60793-2-10 Type A1a.3, ISO/IEC 11801:2011 Ed2.2 OM4.**
- **OS1/OS2 9/125 compliant with ITU G.652.D, IEC 60793-2-50 Type B1.3, ISO/IEC 11801:2011 Ed2.2 OS2.**
- **Cable mechanical characteristics tested according to IEC 60794-1**

Use


- **High data rate fibre optic backbones for building and campus**
- **Horizontal cable (FTTD Fibre to the desk) with the 2 fibres**
- **Suitable for direct termination: installation with connectors (prefbred, cold-cured and/or heat-cured types).**

OM2 50/125 μ m


Diameter	Length	Type
6.7mm	525m	12 fibres, OM2 50/125, Tight buffered, Up to 10Gbps ethernet supported
	2100m	

**OM3 50/125 μ m**

Diameter	Length	Type
6.7mm	525m	12 fibres, OM3 50/125, Tight buffered, Up to 40Gbps ethernet supported
	2100m	

**OS1/OS2 9/125 μ m**

Diameter	Length	Type
6.7mm	525m	12 fibres, OS1/OS2 9/125, Tight buffered, Up to 100Gbps ethernet supported on long distance
	2100m	






Fibre Optic Patch Cord OM2 50/125

Length	Type
1m 2m 3m 5m 10m	Optic Patch Cord SC/SC
1m 2m 3m 5m 10m	Optic Patch Cord LC/LC
1m 2m 3m 5m 10m	Optic Patch Cord LC/SC



Fibre Optic Patch Cord OM3 50/125

Length	Type	
1m 2m 3m 5m 10m	Optic Patch Cord SC/SC	
1m 2m 3m 5m 10m	Optic Patch Cord LC/LC	
1m 2m 3m 5m 10m	Optic Patch Cord LC/SC	

Fibre Optic Patch Cord OS1 9/125

Length	Type
1m 2m 3m 5m 10m	Optic Patch Cord SC/SC
1m 2m 3m 5m 10m	Optic Patch Cord LC/LC
1m 2m 3m 5m 10m	Optic Patch Cord LC/SC



Pigtail Multimode and Singlemode (OM2 - OM3 - OS1)

	Length	Type
Pigtail Multimode and Singlemode OS1	2m	Pigtail OS1 9/125 LC Pigtail OS1 9/125 SC
Pigtail Multimode and Singlemode OM2	2m	Pigtail OM2 50/125 LC Pigtail OM2 50/125 SC
Pigtail Multimode and Singlemode OM3	0.7m	Pigtail OM3 50/125 LC Pigtail OM3 50/125 SC



Coverplates Without Adapters

Coverplate for 3 SC duplex adapters

Coverplate for 6 LC duplex adapters compatible with LC duplex adapter / rect.

Blank Plate

Blank Plate for Fiber Optic Panel



Evolution Universal Sliding Fibre Optic Panel 1U

Technical Specifications: Universal sliding 19" fibre optic panel with 4 positions, equipped with 3 blank plates. The 1st position is empty and is to be fitted with suitable coverplate. | 1 Quick Fix function on both sides to allow a simple, quick fixing position and sliding feature | Removable transparent cover mounted | Fibre patchcord guiding structure at the front, protected by cover equipped with label holders. Evolution panel for direct terminations | Equipped with 2 coiling wheels and 2 PG9 (Ø 7 mm max.) cable glands | Evolution Fibre optic panel 1U with 3 blank plates, for splices



Pigtail Multimode and Singlemode (Duplex Adapter)

Type	SC Duplex Adapter MM	LC Duplex Adapter rect MM
Type	SC Duplex Adapter SM	LC Duplex Adapter rect SM



Splitter Box/PLC 16*1 Fiber optic splitter

Specifications

Splitter Length: 1.5 meters
Number of Final Splitters: 1:16
Cable Diameter: 900 microns
Type of Splitter Cover: Steel
Splitter Technology: PLC
Wavelength: 1260-1620nm
Level of Uniformity: 1.5
Amount of Return: 50
NFC 32 070 2.2 (Category C1)

Optical fiber splitters or 1:16 optical fiber splitters are used in FTTH networks, that is, exactly where the Internet is delivered to customers using optical fiber. It is routed from the server room to the client device without changing the transmission environment. The PLC splitter is available with 1:16 symmetrical power distribution with both input and output interfaces. The compact steel box housing allows for easy installation in fiber optic switches and connectors. The 1:16 fiber optic splitter is built on a slim 0.9mm cable, making it easy to install in a variety of organizers. Splitters play an important role in telecommunication systems by sharing signals sent in PON and GPON systems for subscribers. Splitters are structurally divided into two types: 1*N and 2*N. 1*N splitter is used in star topology and 2*N splitter is used in ring topology. Based on the manufacturing technology, the splitters are divided into two types: PLC SPLITTER and FBT SPLITTER. PLC splitters are produced in the following forms for better and easier performance:

- Splitter box
- Pen splitter
- 19-inch rack mount splitters
- Wood splitters



Splitter Box/PLC Mini Type- Optical Fiber Splitter 1x8 pen

Specifications


- Low drop rate
- High efficiency
- Uniform distribution of power
- Compact design
- Wide operating wavelength
- Wide operating temperature
- Excellent mechanical stability
- Qualified under Telcordia and GR-1209

SC/APC 1:8 fiber optic splitter has one uplink optical interface and several downlink optical interfaces. Optical signals transmitted from the uplink optical interface to all downlink optical links. Only when the optical signals are transmitted from the uplink optical interface to the downlink optical interface, the optical signal power is reduced / when the optical signals are switched from the downlink optical interface to the uplink optical interface, the optical power is reduced, this is true. By using this splitter, we can copy an optical data for monitoring after optical fiber transmission. Telecom fiber optic splitter What is a fiber optic splitter? Splitters play an important role in telecommunication systems by sharing signals sent in PON and GPON systems for subscribers. Splitters are structurally divided into two types: 1*N and 2*N. 1*N splitter is used in star topology and 2*N splitter is used in ring topology. Based on the manufacturing technology, the splitters are divided into two types: PLC SPLITTER and FBT SPLITTER. PLC splitters are produced in the following forms for better and easier performance:

- Splitter box
- Pen splitter
- 19-inch rock mount splitters
- Wood splitters



Mini Type SC-APC Fiber Optic Splitter	Mini Type SC-APC pen					
	Cable Type	Number of Entries	Coating Colour	Connector Colour	Number of Outputs	Connector Type
Mini Type SC-APC 1*2	Mini Type	1	White	Green	2	APC/SC
Mini Type SC-APC 1*4					4	
Mini Type SC-APC 1*8					8	
Mini Type SC-APC 1*32					32	

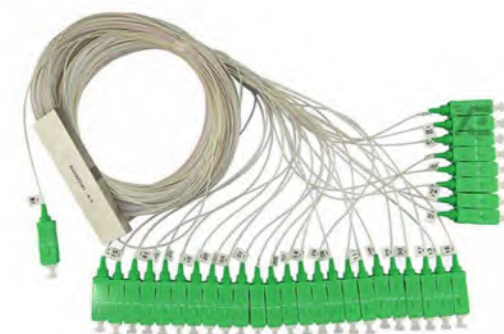

Splitter APC Fiber Optic Splitter

Splitter UPC Fiber Optic Splitter

FAT 48 Core FTTH Fiber Optic Distribution Wall Box

2-Core Fiber Optic ATB Box or FTTH Fiber Optic Network Wall Terminal

Specifications

Colour: White

Body Material: Plastic

Number of Ports: 2 SC Simplex

Type of Use: Surface

ATB-2 FTTH network wall terminal box ATB connects the fiber optic cable that runs outside your home to your modem. The ATB is a small white plastic box (180mm x 50mm x 120mm) that fits on your interi-or wall. It is very important to know where to install the ATB before starting the fiber optic installation project. Because this can affect your bandwidth experience. Your modem connects to your ATB so it must be installed in a very convenient place. Where you have the most internet. ATB or OTO is a box that is installed at the user's location and terminates the Passive Optical Network (PON).



Multimode Fiber Optic Patch Cord LC-LC OM4 (3m)

Specifications


Connector Type: LC/LC
 Fiber Type: Multimode (OM4)
 Cable Length: 3 metres



12-color single mode fiber optic pigtail SC/UPC/LSZH (1.5m)

Specifications

Standard: G65782
 Connector Type: SC
 Fiber Type: single mode
 Cable Length: 1.5 metres
 Color of Cable Cover: 12 colors
 Coating Material: LSZH

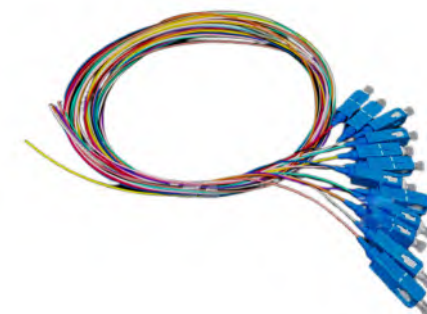

Fiber Optic Splitter Box

FTTH ODF 8 Core

Specifications

Body Colour: White
 Weight (gr): 0.4 grams
 Dimensions (mm): 220 x 215 x 50 mm
 Body Material: ABS Plastic
 Product Type: FIBER ACCESS TERMINAL BOX
 Usage: Can be used in OUTDOOR Environments
 Optical Fiber Splitter: None
 Fiber Optic Adapter: None
 Installable Adapter Type: SC
 Number of Adapters that Can be Installed: 8





Fiber Optic Network Equipment

Unitube Fibre Optic Cables

Compact Universal cables used for direct burial:

- Accurate fibre excess length
- Specially designed compact structure and PE sheath
- Crush resistant and flexible
- PSP enhances the cable's crush-resistance, impact-resistance and moisture proofing
- Two parallel steel wires ensure tensile strength
- Small diameter, lightweight and hassle-free installation
- Long delivery length

Unitube Fibre Optic Cables:

- OM2 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.1 and ISO/IEC 11801:2002 Amd.2 OM2
- OS1 9/125 compliant with ITU G.652.D, IEC 60793-2-50 Type B1.3, ISO/IEC 11801:2011 Ed2.2
- Cable mechanical characteristics tested according to IEC 60794-1.

FL-C Loose Tube Fibre Optic Cables

- Compact and universal cables suitable for indoor and specific out door installations:
 - Low Smoke Zero Halogen (LSZH) green coloured external sheath
 - UV resistant
 - dielectric
 - high tensile strength
 - rodent retardant
 - longitudinally watertight
- Maximum pulling force: 1500 Newton (1800 Newton for 24FO)
- Rodent protection:
 - Minimum bending radius: OD x 10 (ex: 51mm for 5,1mm OD)
 - Ambient air temperature (minimum & maximum):
 - for installation: -5° ... +50°C
 - for operation: -20°... +70°
 - for storage: -40° ... +70°
- Tight buffer edge l-free cable construction with 900 µm coating.
- Flame retardant according to IEC 60 332-1, EN 50 265 2.1, NFC 32 070 2.1 (Category C2). Fire retardant according to IEC 60

332-3 C, EN 50 266, NFC 32 070 2.2 (Category C1) Performances

- OM2 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.1 and ISO/IEC 11801:2011 Ed2.2 OM2.
- OM3 50/125 compliant with ITU G.651, IEC 60793-2-10 Type A1a.2 and ISO/IEC 11801:2011 Ed2.2 OM3.
- OM4 50/125 compliant with IEC 60793-2-10 Type A1a.3, ISO/IEC 11801:2011 Ed2.2 OM4.
- OS1/OS2 9/125 compliant with ITU G.652.D, IEC 60793-2-50 Type B1.3, ISO/IEC 11801:2011 Ed2.2 OS2.
- Cable mechanical characteristics tested according to IEC 60794-1 Use
- High data rate fibre optic backbones for building and campus
- Horizontal cable (F TTD Fibre to the desk) with the 2 fibres
- Suitable for direct termination: installation with connectors (prebred. cold-cured and/or heat-cured types).

FL-C Tight Buffered Fibre Optic Cables

- Compact and universal cables suitable for indoor and specific out door installations:
 - Low Smoke Zero Halogen (LSZH) green coloured external sheath
 - UV resistant
 - dielectric
 - high tensile strength
 - rodent retardant
 - longitudinally watertight
- Maximum pulling force: 1500 Newton (1800 Newton for 24FO)
- Rodent protection:
 - Minimum bending radius: OD x 10 (ex: 51mm for 5,1mm OD)
 - Ambient air temperature (minimum & maximum):
 - for installation: -5° ... +50°C
 - for operation: -20°... +70°
 - for storage: -40° ... +70°
- Tight buffer edge l-free cable construction with 900 µm coating.
- Flame retardant according to IEC 60 332-1, EN 50 265 2.1, NFC 32 070 2.1 (Category C2). Fire retardant according to IEC 60 332-3 C, EN 50 266, NFC 32 070 2.2 (Category C1)

FL-C Tight Buffered Fibre Optic Cables Performances

- OM2 50/125 compliant with ITU G.651, IEC 60793-2- 10 Type A1a.1 and ISO/IEC 11801:2011 Ed2.2 OM2.
- OM3 50/125 compliant with ITU G.651, IEC 60793-2- 10 Type A1a.2 and ISO/IEC 11801:2011 Ed2.2 OM3.
- OM4 50/125 compliant with IEC 60793- 2-10 Type A1a.3, ISO/IEC 11801:2011 Ed2.2 OM4.
- OS1/OS2 9/125 compliant with ITU G.652.D , IEC 60793- 2-50 Type B1.3, ISO/IEC 11801:2011 Ed2.2 OS2.
- Cable mechanical characteristics tested according to IEC 60794- 1 Use
- High data rate fibre optic backbones for building and campus
- Horizontal cable (F TTD Fibre to the desk) with the 2 fibres
- Suitable for direct termination: installation with connectors (prefbred, cold-cured and/or heat-cured types).

Evolution Universal Sliding Fibre Optic Panel 1U

Universal sliding 19" fibre optic panel with 4 positions, equipped with 3 blank plates.

The 1st position is empty and is to be fitted with suitable coverplate. | 1 Quick Fix function on both sides to allow a simple, quick fixing position and sliding feature | Removable transparent cover mounted | Fibre patchcord guiding structure at the front, protected by cover equipped with label holders. Evolution panel for direct terminations | Equipped with 2 coiling wheels and 2 PG9 (Ø 7 mm max.) cable glands | Evolution Fibre optic panel 1U with 3 blank plates, for splices.

Splitter Bo x/PLC 16*1 Fiber optic splitter

Splitter Length: 1.5 meters
Number of Final Splitters: 1:16
Cable Diameter: 900 microns
Type of Splitter Cover: Steel
Splitter Technology: PLC
Wavelength: 1260-1620nm
Level of Uniformity: 1.5
Amount of Return: 50
NFC 32 070 2.2 (Category C1)

Optical fiber splitters or 1:16 optical fiber splitters are used in FTTH networks, that is, exactly where the Internet is delivered to customers using optical fiber. It is routed from the server room to the client device without changing the transmission environment. The PCL splitter is available with 1:16 symmetrical power distribution with both input and output interfaces. The compact steel box housing allows for easy installation in fiber optic switches and connectors. The 1:16 fiber optic splitter is built on a slim 0.9mm cable, making it easy to install in a variety of organizers. Splitters play an important role in telecommunication systems by sharing signals sent in PON and GPON systems for subscribers. Splitters are structurally divided into two types: 1*N and 2*N. 1*N splitter is used in star topology and 2*N splitter is used in ring topology. Based on the manufacturing technology, the splitters are divided into two types: PLC SPLITTER and FBT SPLITTER. PLC splitters are produced in the following forms for better and easier performance:

Splitter box / Pen splitter / 19-inch rock mount splitters / Wood splitters

Splitter Bo x/PLC Mini Type- Optical Fiber Splitter 1x8 pen

- Low drop rate
- High efficiency
- Uniform distribution of power
- Compact design
- Wide operating wavelength
- Wide operating temperature
- Excellent mechanical stability

Qualified under Telcordia and GR-1209 SC/APC 1:8 fiber optic splitter has one uplink optical interface and several downlink optical interfaces. Optical signals transmitted from the uplink optical interface to all downlink optical links. Only when the optical signals are transmitted from the uplink optical interface to the downlink optical interface, the optical signal power is reduced / when the optical signals are switched from the downlink optical interface to the uplink optical interface, the optical power is reduced; this is true. By using this splitter, we can copy an optical data for monitoring after optical fiber transmission. Telecom fiber optic splitter What is a fiber optic splitter? Splitters play an important role in telecommunication systems by sharing signals sent in PON and GPON systems for subscribers. Splitters are structurally divided into two types: 1*N and 2*N. 1*N splitter is used in star topology and 2*N splitter is used in ring topology. Based on the manufacturing technology, the splitters are divided into two types:

PLC SPLITTER and FBT SPLITTER. PLC splitters are produced in the following forms for better and easier performance:

Splitter box
Pen splitter
19-inch rock mount splitters
Wood splitters

2-Core Fiber Optic A TB Box or FTTH Fiber Optic Network Wall Terminal

Colour: White
Body Material: Plastic
Number of Ports: 2 SC Simplex
Type of Use: Surface
ATB-2 FTTH network wall terminal box ATB connects the fiber optic cable that runs outside your home to your modem. The ATB is a small white plastic box (180mm x 50mm x 120mm) that fits on your interior wall. It is very important to know where to install the ATB before starting the fiber optic installation project. Because this can affect your bandwidth experience. Your modem connects to your ATB so it must be installed in a very convenient place. Where you have the most internet. ATB or OTO is a box that is installed at the user's location and terminates the Passive Optical Network (PON).
Multimode Fiber Optic Patch Cord LC-LC OM4 (3m):
Connector Type: LC/LC
Fiber Type: Multimode (OM4)
Cable Length: 3 metres

12-color single mode fiber optic pigtail SC/UPC/LS ZH (1.5m)

Standard: G65782

Connector Type: SC

Fiber Type: single mode

Cable Length: 1.5 metres

Color of Cable Cover: 12 colors

Coating Material: LSZH

**FTTH OD F 8 Core**

Body Colour: White

Weight (gr): 0.4 grams

Dimensions (mm): 220 x 215 x 50 mm

Body Material: ABS Plastic

Product Type: FIBER ACCESS TERMINAL BOX

Usage: Can be used in OUTDOOR Environments

Optical Fiber Splitter: None

Fiber Optic Adapter: None

Installable Adapter Type: SC

Number of Adapters that Can be Installed: 8





CERTIFICATE

THE MANAGEMENT SYSTEM OF
TOSEE VA TAMIN BANA GOSTAR ASIA SAZEH CO. (KETROWA)

NO.477, BETWEEN 1ST AND 2ND VAHED ST., SHAHID BEHESHTI BLVD., BAGHESTAN HWY., SHAHRSAI, TEHRAN PROVINCE, IRAN

has been assessed and certified as meeting the requirements of

ISO 14001:2015

Environmental management system

FOR THE FOLLOWING ACTIVITIES

Comprehensive Supplier of Building Materials

CERTIFICATE REGISTRATION NO.: QMS933306
ORIGINAL CERTIFICATION DATE: MAY 07, 2025
CURRENT CERTIFICATION DATE: MAY 07, 2025
CERTIFICATE EXPIRY DATE: MAY 07, 2028
THIS CERTIFICATE REMAINS VALID SUBJECT TO SATISFACTORY SURVEILLANCE AUDITS.


Authorized Signatory
EIQM Ltd. Certification Services
info@eiqmcert.com


verified



EIQM Ltd. Certification Services is a certification body for assessment of objective evidence and issuance of certificate. this certificate is issued on the basis of the independent authority of the EIQM certification services. we partner with you to offer independent services that will help you, streamline your processes and operate in a more sustainable manner.
The validity of this certificate can be verified at www.eiqmcert.com



CERTIFICATE

THE MANAGEMENT SYSTEM OF
TOSEE VA TAMIN BANA GOSTAR ASIA SAZEH CO. (KETROWA)

NO.477, BETWEEN 1ST AND 2ND VAHED ST., SHAHID BEHESHTI BLVD., BAGHESTAN HWY., SHAHRSAI, TEHRAN PROVINCE, IRAN

has been assessed and certified as meeting the requirements of

ISO 45001:2018

Occupational health and safety management system

FOR THE FOLLOWING ACTIVITIES

Comprehensive Supplier of Building Materials

CERTIFICATE REGISTRATION NO.: QMS933307
ORIGINAL CERTIFICATION DATE: MAY 07, 2025
CURRENT CERTIFICATION DATE: MAY 07, 2025
CERTIFICATE EXPIRY DATE: MAY 07, 2028
THIS CERTIFICATE REMAINS VALID SUBJECT TO SATISFACTORY SURVEILLANCE AUDITS.


Authorized Signatory
EIQM Ltd. Certification Services
info@eiqmcert.com


verified



EIQM Ltd. Certification Services is a certification body for assessment of objective evidence and issuance of certificate. this certificate is issued on the basis of the independent authority of the EIQM certification services. we partner with you to offer independent services that will help you, streamline your processes and operate in a more sustainable manner.
The validity of this certificate can be verified at www.eiqmcert.com



CERTIFICATE

THE MANAGEMENT SYSTEM OF
TOSEE VA TAMIN BANA GOSTAR ASIA SAZEH CO. (KETROWA)

NO.477, BETWEEN 1ST AND 2ND VAHED ST., SHAHID BEHESHTI BLVD., BAGHESTAN HWY., SHAHRSAI, TEHRAN PROVINCE, IRAN

has been assessed and certified as meeting the requirements of

ISO 9001:2015

Quality management system

FOR THE FOLLOWING ACTIVITIES

Comprehensive Supplier of Building Materials

CERTIFICATE REGISTRATION NO.: QMS933305
ORIGINAL CERTIFICATION DATE: MAY 07, 2025
CURRENT CERTIFICATION DATE: MAY 07, 2025
CERTIFICATE EXPIRY DATE: MAY 07, 2028
THIS CERTIFICATE REMAINS VALID SUBJECT TO SATISFACTORY SURVEILLANCE AUDITS.


Authorized Signatory
EIQM Ltd. Certification Services
info@eiqmcert.com


verified



EIQM Ltd. Certification Services is a certification body for assessment of objective evidence and issuance of certificate. this certificate is issued on the basis of the independent authority of the EIQM certification services. we partner with you to offer independent services that will help you, streamline your processes and operate in a more sustainable manner.
The validity of this certificate can be verified at www.eiqmcert.com



CERTIFICATE

THE MANAGEMENT SYSTEM OF
TOSEE VA TAMIN BANA GOSTAR ASIA SAZEH CO. (KETROWA)

NO.477, BETWEEN 1ST AND 2ND VAHED ST., SHAHID BEHESHTI BLVD., BAGHESTAN HWY., SHAHRSAI, TEHRAN PROVINCE, IRAN

has been assessed and certified as meeting the requirements of

IMS

ISO 9001:2015 , ISO 14001:2015 , ISO 45001:2018

FOR THE FOLLOWING ACTIVITIES

Comprehensive Supplier of Building Materials

CERTIFICATE REGISTRATION NO.: QMS933308
ORIGINAL CERTIFICATION DATE: MAY 07, 2025
CURRENT CERTIFICATION DATE: MAY 07, 2025
CERTIFICATE EXPIRY DATE: MAY 07, 2028
THIS CERTIFICATE REMAINS VALID SUBJECT TO SATISFACTORY SURVEILLANCE AUDITS.


Authorized Signatory
EIQM Ltd. Certification Services
info@eiqmcert.com


verified



EIQM Ltd. Certification Services is a certification body for assessment of objective evidence and issuance of certificate. this certificate is issued on the basis of the independent authority of the EIQM certification services. we partner with you to offer independent services that will help you, streamline your processes and operate in a more sustainable manner.
The validity of this certificate can be verified at www.eiqmcert.com





info@ketrowa.com

www.ketrowa.ir